

Thyristor Presspack stack

Electrical Characteristics						
Symbol	Conditions		min	typ	max	Unit
Electrical Data						
$I_D$	Maximum DC current	$T_{AMBIENT} = 35^{\circ}C$ ; No overload		1 890		A
$V_{AC}$	Maximum AC voltage (+/-10%)			500		$V_{AC}$
$V_{BUS}$	DC Bus voltage			670		$V_{DC}$
$P_{TOTAL}$	Maximum stack power			1 270		kW
$P_{LOSS}$	Stack power loss ( $T_{AMBIENT} = 35^{\circ}C$ )					W

Environmental Data						
Symbol	Conditions		min	typ	max	Unit
Mechanical Data						
Drawing	SEMIKRON document number.revision.version			11110716.01.A		-
Weight	Approximate total weight			78.8		kg
Altitude	Installation altitude without derating				1 000	m
Protection	IEC 60529			IP00		-
Pollution Degree	EN 50178			2		-

Fan Data						
Type	SEMIKRON fan designation			SKF N4-230-03		-
$V_{FAN}$	Fan voltage			230		$V_{AC}$
$f_{FAN}$	Fan frequency			50/60		Hz
$I_{FAN}$	Fan maximum input current			1.1/1.71		A
$P_{FAN}$	Fan power			250/390		W

Stack Protection						
Symbol	Conditions		min	typ	max	Unit
RC Circuit						
Type	RC in parallel with each electrical switch			-		-
R	Resistance (80W)			33		Ohm
C				0.47		$\mu F$

Fuses						
Size	1 fuse per switch, with microswitches			33		-
$I_{N RMS}$	Caliber			1 400		A
$U_N$	Nominal voltage (IEC)			690		V
$I^2t$	Total at $U_N$ at room temperature (approx. 20...25°C)				2 625	$kA^2s$

Bimetal Thermal Trip						
$T_S$	Switching temperature over which thermal trip is open			95		$^{\circ}C$
$I_{TC MAX}$	Maximum permissible current		at 240VAC	1		A
			at 30VDC	3		A

## SEMISTACK® CLASSICS - B6C

Three phase controlled rectifier

### Preliminary Data

Ordering No. 08785003  
Description SKS 1890F B6C 1270 V16 ZU

### Features


- Non-isolated power stacks
- SKT 1200/16
- Heatsink P18/180
- Forced air cooling
- RC circuit included
- Fuses with microswitches
- Thermal trip included

### Typical Applications


- Regulated power supplies
- Alternator excitation
- Motor control

### Remarks

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee, expressed or implied, is made regarding delivery, performance or suitability.

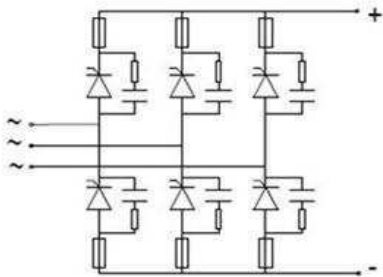

B6C

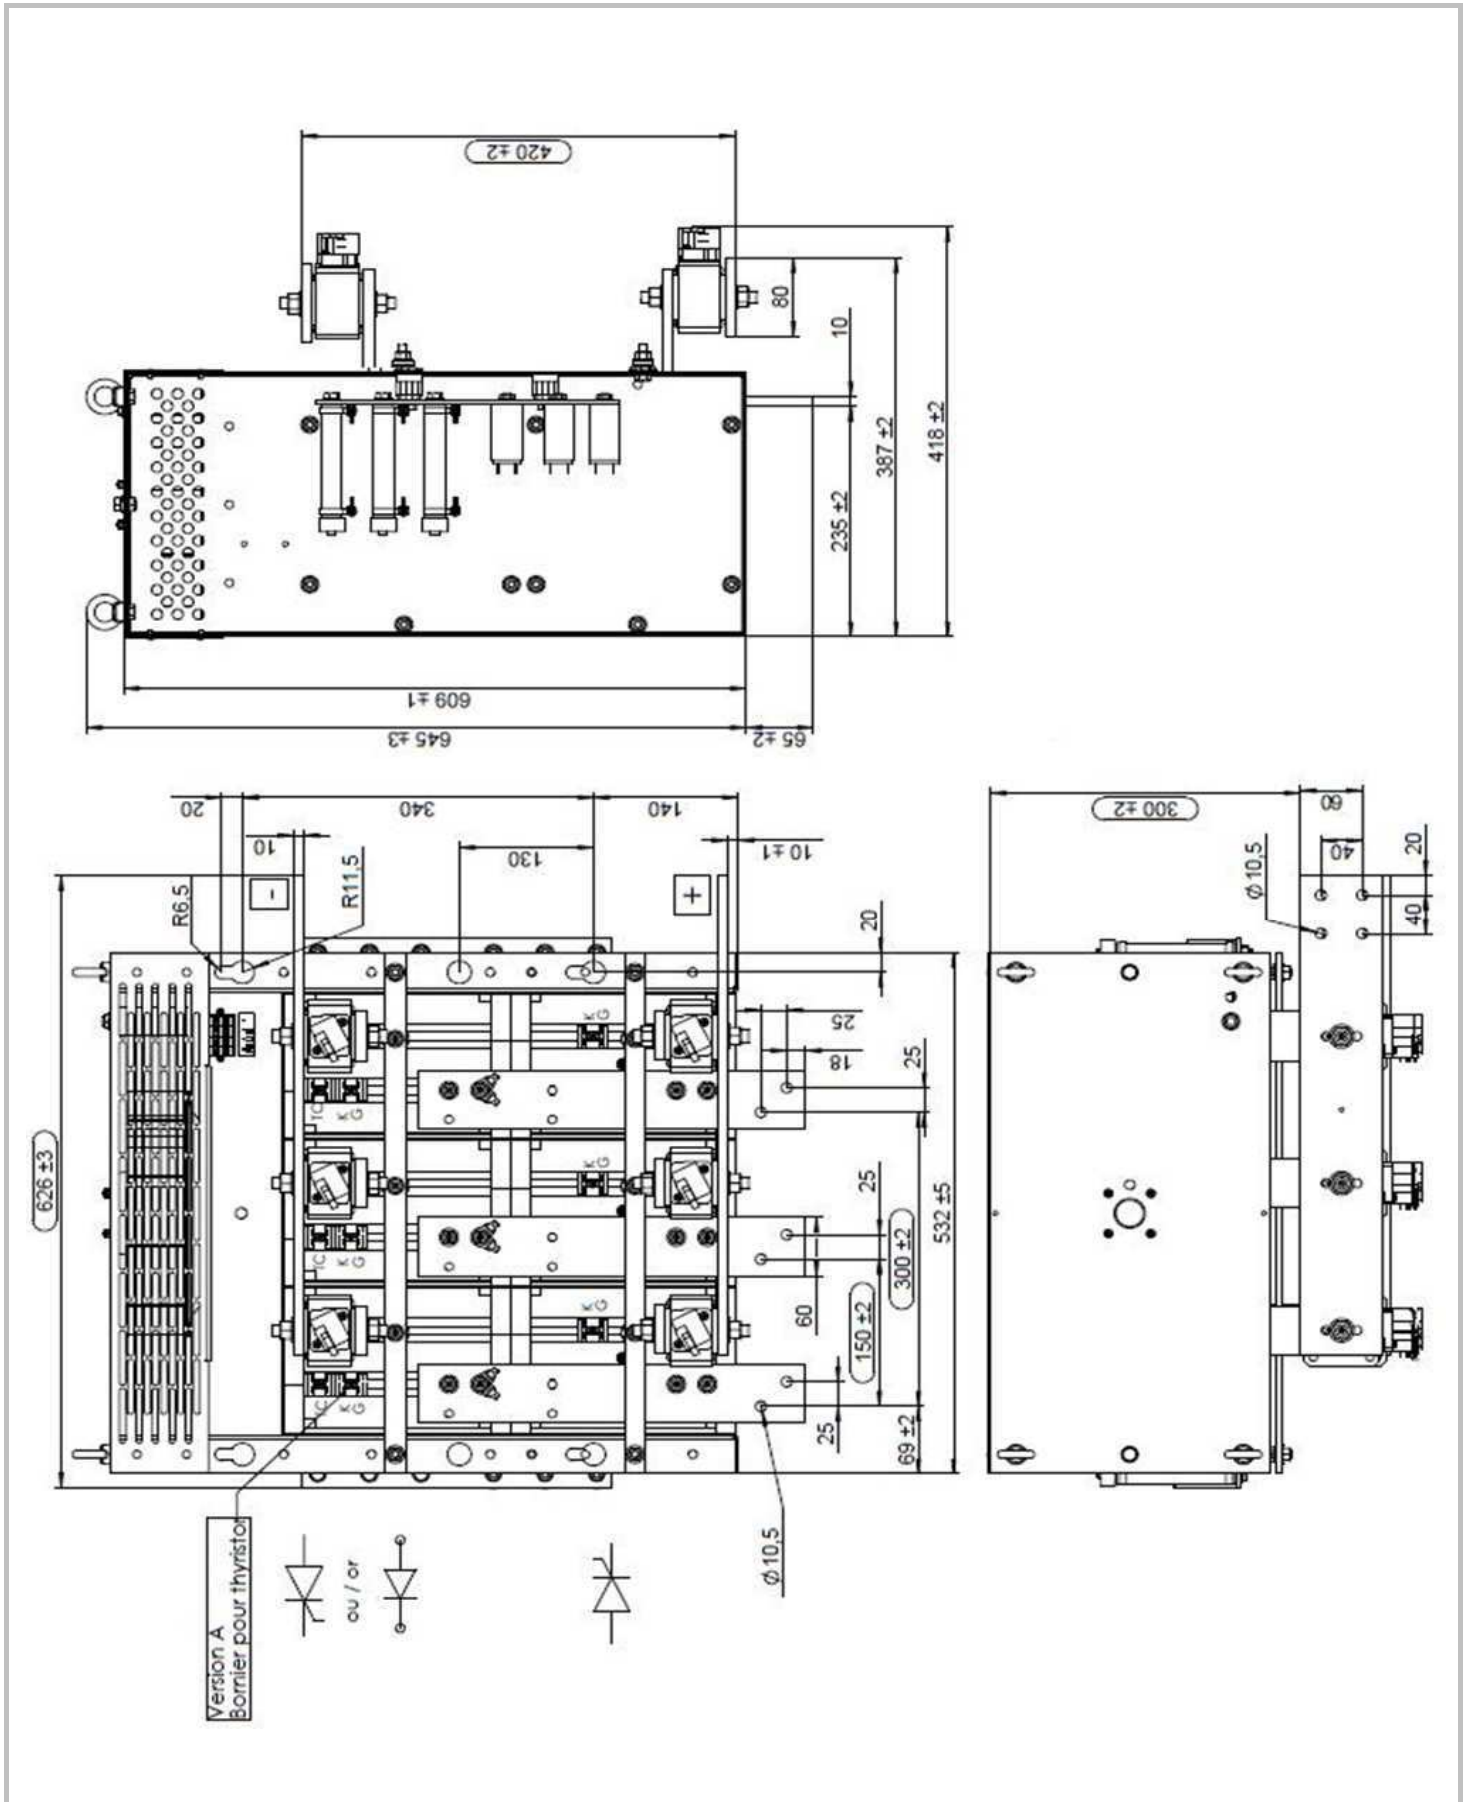

Dimensions

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.