

## 6 Mounting Hardware for SEMIPACK® Modules

For SEMIPACK 1,2,3,4 there are complete kits available:

| Hardware needed for one SEMIPACK®   | SEMIPACK®1<br>a) SKKD/E 26...100<br>b) SKKT/H/L<br>20...106  | SEMIPACK®2<br>SKKT/H 122...162<br>SKKD/E 162,<br>SKKD 212   | SEMIPACK®3<br>SKKT/H/L<br>213...330<br>SKKD/E 260,380  | SEMIPACK®4<br>SKET 330, 400<br>SKKE 400   |
|---|--|---|--|---|
| Gate female plug<br>Insulating sleeve<br>Double plug caps<br>Baseplate screws<br>Terminal screws<br>Washers<br>Spring washers | b: 2 pcs. 2,8 × 0,8 mm <sup>1)</sup><br>b: 4 pcs.<br>2 pcs. M5 × 18 socket head<br>3 pcs. M5 × 10 pozidrive head<br>captive<br>captive | 4 pcs.<br>2,8 × 0,8 mm <sup>1)</sup><br>-<br>2 pcs. (right+left)<br>2 pcs. M5 × 18 socket head<br>3 pcs. M6 × 12 pozidrive head<br>(3 pcs. 6,4 mm $\varnothing$ )<br>(3 pcs. 6,4 mm $\varnothing$ ) | 4<br>4 pcs. 2,8 × 0,8 mm <sup>1)</sup><br>-<br>2 pcs. (right+left)<br>4 pcs. M5 × 18 <sup>2)</sup> socket head<br>3 pcs. M8 × 16, hexagon head<br>captive<br>captive | 2 pcs. 2,8 × 0,8 mm <sup>1)</sup><br>-<br>1 pcs. (right)<br>4 pcs. M5 × 18 <sup>2)</sup> socket head<br>2 pcs. M10 × 50 <sup>1)</sup><br>2 pcs. 10,5 mm $\varnothing$ |
| Part No. of the complete kit  | for 12 SEMIPACKs<br>a: 33704200<br>b: 33403900   | for 8 SEMIPACKs<br>33404000   | for 3 SEMIPACKs<br>33404100  | for 3 SEMIPACKs<br>33404500   |

Fig.6-1 Mounting hardware for SEMIPACK modules

<sup>1)</sup> Spindle No. 30143660 with 2 nuts M 10

<sup>2)</sup> For SEMIPACK 3 with 10 mm thick base plates and SEMIPACK 4 on heat sink P3, use M5×20(No. 30145490), available on request

All accessories can also be ordered separately,

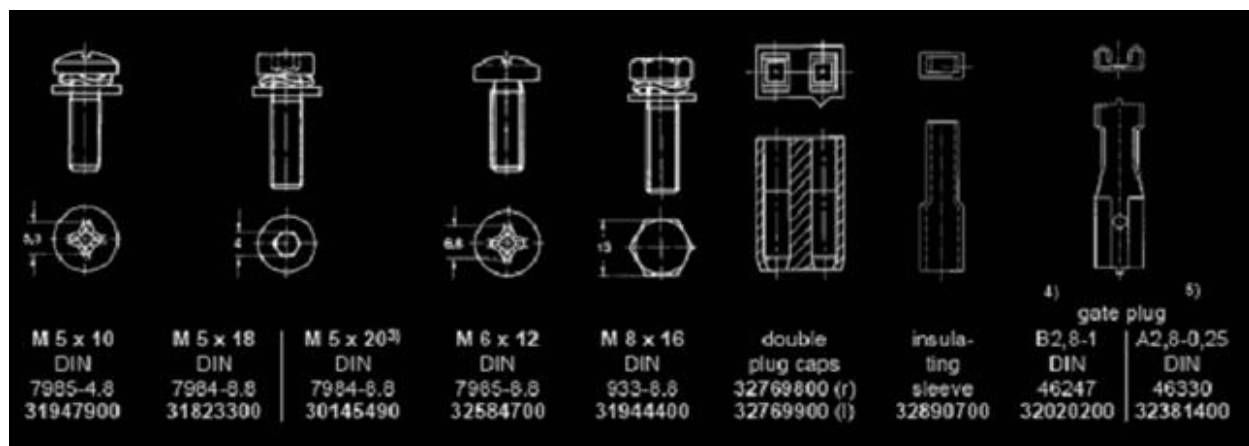


Fig.6-2 Mounting screws for SEMIPACK Modules

Two different double plug caps are available, 32769800(r) has a right nose and 32769900(l) has a left nose. 32769800(r) is used for terminals 4 and 5 of SEMIPACK 2,3,4,5; 32769900(l) is used for terminals 6 and 7 of SEMIPACK 2,3,5 and SEMIPACK 6.